

DATASHEET

# Rockfon Color-all® Special



# Rockfon Color-all® Special



- Innovative and aesthetically pleasing smooth, matt surface with an unlimited custom colour range using NCS
- Rockfon Color-all Special is available in exposed, semi-concealed and concealed edges in a large variety of module sizes, allowing for unique design freedom to inspire and enhance your interior design scheme

## Product Description

- Stone wool tile
- Visible side: smooth coloured, matt fleece
- Rear side: back fleece

## Application Areas

- Industry
- Office
- Leisure
- Retail
- Education
- Healthcare

Edge detail	Module size (mm)	Approximate weight (kg/m <sup>2</sup> )	Recommended installation System	Recycled content	Cradle to Cradle Certified®	A1-A3 Production stage impact (kg CO <sub>2</sub> eq/m <sup>2</sup> )*	A1-C4 Full life cycle impact (kg CO <sub>2</sub> eq/m <sup>2</sup> )*
 A15	600 x 600 x 20	3.4	Rockfon® System T15 A	38%		3.62	4.6
	1200 x 600 x 20		Rockfon® System T15 A				
 A24	600 x 600 x 20	3.4	Rockfon® System T24 A	38%		3.62	4.6
	1200 x 600 x 20		Rockfon® System XL T24 A				
 E24	600 x 600 x 20	3.4	Rockfon® System T24 E	38%		3.62	4.6
 X	600 x 600 x 22	3.7	Rockfon® System T24 X	38%		3.56	4.62
	1200 x 600 x 22		Rockfon® System T24 X				

Rockfon Color-all Special is a bespoke colour matching service for both tiles and grids using NCS references. For specific pricing and minimum quantities, please call for details.

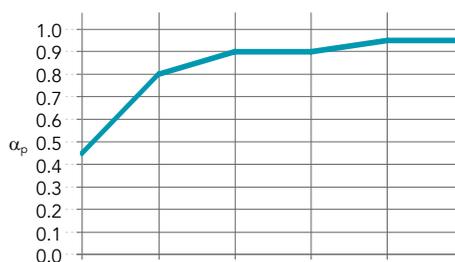
\* For full environmental impact disclosure, see our product EPDs available on [rockfon.link/int-epd](https://rockfon.link/int-epd). Due to differences in calculation methods and scenario assumptions, environmental impact values are generally not directly comparable between manufacturers.



## Performance



**Sound absorption**  
 $\alpha_w$ : 0.95 (Class A)



Thickness (mm) /  
 Suspension (incl. tile - mm)

Thickness (mm) / Suspension (incl. tile - mm)	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	$\alpha_w$	Absorption class	NRC
20-40 / 200	0.45	0.80	0.90	0.90	0.95	0.95	0.95	A	0.85



**Reaction to fire**  
 A2-s1,d0



**Light reflection**  
 Colour-dependent



**Humidity and sag resistance**  
 Up to 100% RH.  
 No visible deflection in high humidity.  
 C/0N



**Cleaning**  
 - Vacuum



**Hygiene**  
 Stone wool provides no sustenance to microorganisms



**Recyclability**  
 Fully recyclable stone wool



**Indoor environment**  
 Rockfon ceiling products are classified in Class E1 in accordance with EN 13964 (EN 717-1).



**Material Health**  
 All materials used in Rockfon products are screened against the list of substances restricted under REACH and do not contain substances of very high concern (SVHC). Rockfon stone wool fibres comply with the safe fibre EU regulation and hold an EUCEB certification.

The properties presented on this datasheet cover the majority of the NCS colour selection. For detailed information on specific NCS colours please contact Rockfon Customer Service.

Rockfon production facilities are certified according to the ISO 9001 and ISO 14001 management systems standards.

# Sounds Beautiful

