

DATASHEET

Rockfon® Tropic



Rockfon® Tropic



- Smooth attractive white surface for various applications
- Class A sound absorption
- Full range of formats in semi-concealed and visible grid options
- Easy to clean with a vacuum

Product Description

- Stone wool tile
- Visible side: smooth white painted fleece
- Rear side: back fleece
- Painted edges

Application Areas

- Office
- Education
- Leisure
- Retail

Edge detail	Module size (mm)	Approximate weight (kg/m ²)	Recommended installation System	Recycled content	Cradle to Cradle Certified®	A1-A3 Production stage impact (kg CO ₂ eq/m ²)*	A1-C4 Full life cycle impact (kg CO ₂ eq/m ²)*
 A15	600 x 600 x 15	2.0	Rockfon® System T15 A	52%		1.99	2.45
	1200 x 600 x 15		Rockfon® System T15 A				
	600 x 600 x 20	2.4	Rockfon® System T15 A				
	1200 x 600 x 20		Rockfon® System T15 A				
 A24	600 x 600 x 15	2.0	Rockfon® System T24 A	52%		1.99	2.45
	1200 x 600 x 15		Rockfon® System T24 A				
	600 x 600 x 20	2.4	Rockfon® System T24 A				
	1200 x 600 x 20		Rockfon® System T24 A				
	1800 x 600 x 20		Rockfon® System T24 A				
 E15	600 x 600 x 15	2.2	Rockfon® System T15 E	52%		2.33	2.93
	1200 x 600 x 15		Rockfon® System T15 E				
 E24	600 x 600 x 15	2.2	Rockfon® System T24 E	52%		2.33	2.93
	1200 x 600 x 15		Rockfon® System T24 E				
	600 x 600 x 20	2.8	Rockfon® System T24 E				
	1200 x 600 x 20		Rockfon® System T24 E				

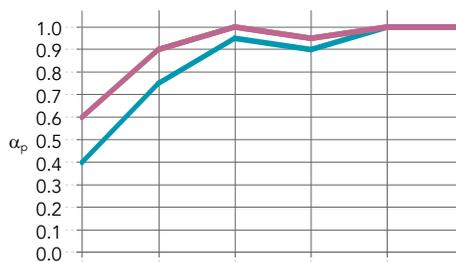
* For full environmental impact disclosure, see our product EPDs available on rockfon.link/int-epd. Due to differences in calculation methods and scenario assumptions, environmental impact values are generally not directly comparable between manufacturers.



Performance



Sound absorption
 α_w : up to 1.00 (Class A)



Edge / Thickness (mm) /
 Suspension (incl. tile - mm)

	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	α_w	Absorption class	NRC
A,E: 15 / 200	0.40	0.75	0.95	0.90	1.00	1.00	0.95	A	0.90
A: 20 / 200	0.60	0.90	1.00	0.95	1.00	1.00	1.00	A	1.00
A,E: 20 / 200	0.60	0.90	1.00	0.95	1.00	1.00	1.00	A	1.00



Reaction to fire
 A1



Light reflection
 86%



Humidity and sag resistance
 Up to 100% RH.
 No visible deflection in high humidity.
 C/0N



Cleaning
 - Vacuum



Hygiene
 Stone wool provides no sustenance to microorganisms



Recyclability
 Fully recyclable stone wool



Indoor environment
 Rockfon ceiling products are classified in Class E1 in accordance with EN 13964 (EN 717-1). Rockfon ceiling products have a very low release of VOCs. A selection of Rockfon products have achieved the following performance levels and labels in indoor air emissions:



Material Health
 All materials used in Rockfon products are screened against the list of substances restricted under REACH and do not contain substances of very high concern (SVHC). Rockfon stone wool fibres comply with the safe fibre EU regulation and hold an EUCEB certification.

12.2025 | All colour codes mentioned are based on the NCS - Natural Colour System® property of and used on license from NCS Colour AB, Stockholm 2012 or the RAL colour standard. Subject to alterations in range and product technology without prior notice. Rockfon accepts no responsibility for printing errors.

Sounds Beautiful

