


Chicago Metallic[™] T24 3830

Datasheet

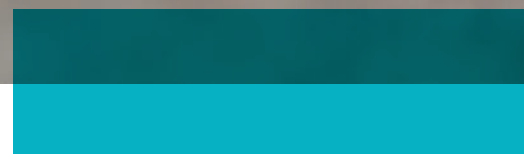


Sounds Beautiful


Chicago Metallic™ T24 3830

- 24mm grid with an universal main runner and joggled-end cross tees
- A combination of 38mm main tees and 28/25mm cross tees for mid weight tiles
- Ease of installation and smooth coupling that allow demountability
- Used to create concealed and exposed ceiling solutions

Cross-section



Compatible tiles












Coupling

Joggled end








Assortment

Product group		Component description	Height (mm)	Length (mm)	Body Material thickness	Colour	Pcs per pack	Lm per pack	Kg per pack
Main runner									
T24 MR CLICK		Main runner T24 Click	38	3600	0.3mm	02	20	72	21
Cross tee									
T24 CT CLICK		Cross tee T24 Click	28	1200	0.27mm	02	60	72	16.7
T24 CT CLICK			28	600	0.27mm	02	60	36	8
T24 CT CLICK			25	1200	0.27mm	02	60	72	15.8
T24 CT CLICK			25	600	0.27mm	02	60	36	7.9
Wall angle options									
L24x24		L Wall angle 24 x 24mm	24	3000	0.4mm	02	40	120	19.7
L24x24			24	3000	0.33mm	02	40	120	16.8
W20x10x10x14		W Profile 20 x 10 x 10 x 14mm	20	3000	0.4mm	02	40	120	20
Accessories									
FH B		Hanger. Height 57.5mm. Max weight 35kg	57.5	21.5			200		3.21

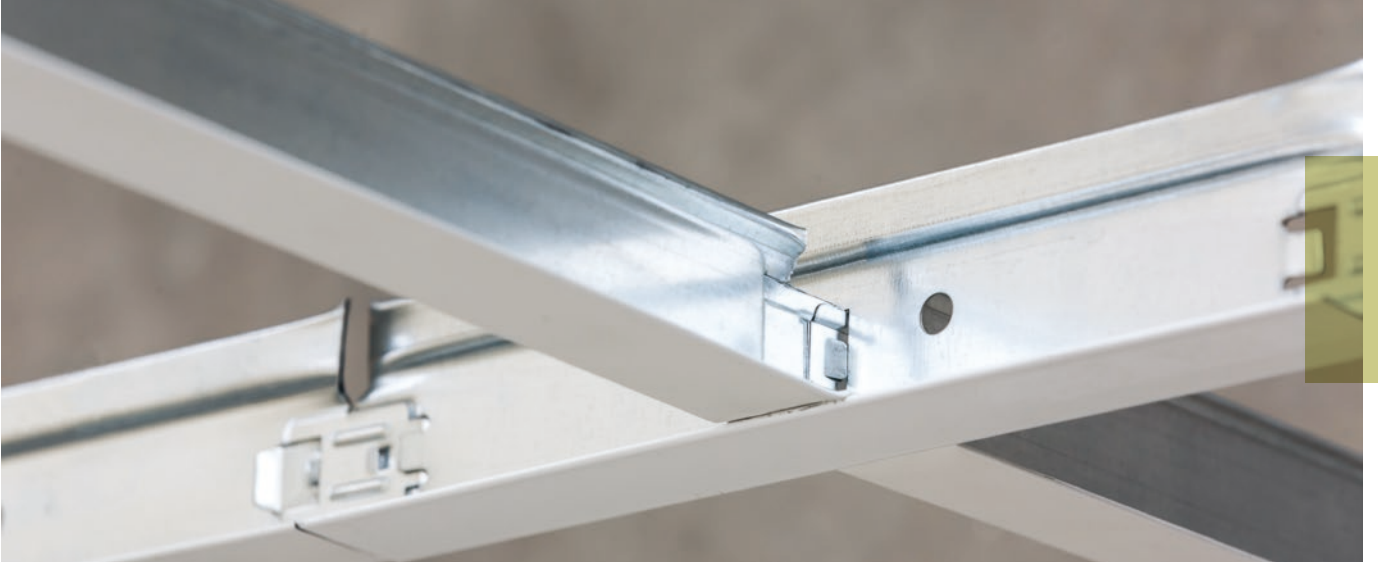

Position of slots and suspension holes

Product group	Component description	Height (mm)	Length (mm)	Slots	Distance between slots (mm)
T24 MR CLICK	Main runner T24 Click	38	3600	24	 75 / 150 / 22 x 150 / 75
T24 CT CLICK	Cross tee T24 Click	28	1200	1	 600 / 600
T24 CT CLICK		28	600	0	 600
T24 CT CLICK		25	1200	1	 600 / 600
T24 CT CLICK		25	600	0	 600

Performance



Load bearing capacity

Kg/m ²	
Hanger distance (mm)	Maximum deflection
1200	3.3 mm
	11



Reaction to fire

Non-combustible



Environment

Fully Recyclable

Rockfon® is a registered trademark
of the ROCKWOOL Group.

 [linkedin.com/company/Rockfon-as](https://www.linkedin.com/company/Rockfon-as)

 [pinterest.com/Rockfon](https://www.pinterest.com/Rockfon)

 [youtube.com/RockfonOfficial](https://www.youtube.com/RockfonOfficial)

 [facebook.com/RockfonOfficial](https://www.facebook.com/RockfonOfficial)

 [instagram.com/Rockfon_Official](https://www.instagram.com/Rockfon_Official)

03.2022 | All colour codes mentioned are based on the NCS - Natural Colour System® property of and used on
license from NCS Colour AB, Stockholm 2012 or the RAL colour standard. Subject to alterations in range and product
technology without prior notice. Rockfon accepts no responsibility for printing errors.

Sounds Beautiful

Rockfon Singapore

ROCKWOOL Building Materials
(Singapore) Pte Ltd.
No. 7, Tuas Avenue 1
Jurong Town,
Singapore 639492
Tel: (+65) 6861 4722
Fax: (+65) 6862 3533
E-mail: enquiry@rockfon.com
en.rockfon.international

Rockfon Hong Kong

ROCKWOOL Building Materials
(Hong Kong) Ltd.
Unit 301-2, 3/F, Koon Wah Building,
No.2 Yuen Shun Circuit,
Yuen Chau Kok, Shatin,
N.T., Hong Kong
Tel: (+852) 2576-6117
Mobile: (+852) 9161-7924
E-mail: enquiry@rockfon.com
en.rockfon.international

Rockfon

ROCKWOOL Middle East FZE
Office 139, Building 6WB, DAFZA
P. O. Box 293585, Dubai, UAE

Tel: +971-4-214-6280
E-mail: rockfonme@rockfon.com
en.rockfon.international

Rockfon

ROCKWOOL France S.A.S.
111, rue du Château des Rentiers
75013 Paris

Tel: +33 1 40 77 82 82
Fax.: +33 1 45 86 77 90
E-mail: info@rockfon.fr
www.rockfon.fr

