


DATASHEET

Hold down clips & wall springs

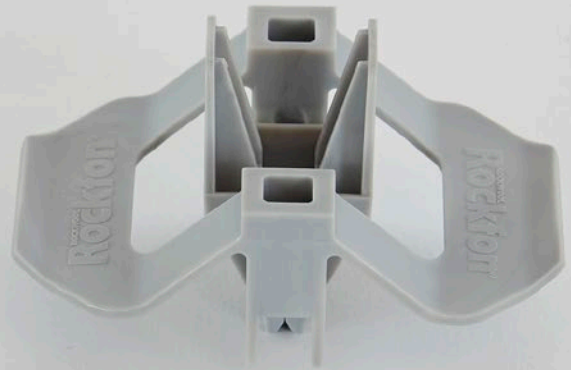

Hold down clips & wall springs

- Specifically designed clips and springs for optimal pressure distribution and easy (de)mounting
- The plastic clips are suitable for humid environments
- A wide range for very thick tiles or specific applications, such as metal ceilings and perimeter finishes

Assortment

Product group		Component description	Pcs per pack	Kg per pack
HDC 1		Plastic hold down clip for tile thickness 15-20 mm (A edge), 15-30 mm (E edge), 20-25 mm (X, M, Z edge), 20-30 mm (D edge)	100	1.34
HDC 2		Plastic hold down clip for tile thickness 25-30 mm (A edge), 40 mm (E, D edge)	150	1.65
HDC 3		Plastic hold down clip for tile thickness 40 mm (A edge), 50 mm (D edge)	100	1.12
HDC 4		Steel hold down clip for tile thickness 15-20 mm (A edge)	100	0.3
HDC 6 P1		Steel hold down clip for tile thickness 45-110 mm (A edge) (to be combined with HDC 6 P2)	100	0.9
HDC 6 P2		Steel hold down spring combinable with holddown clip HDC 6 P1	100	2.7
HDC W1		Steel perimeter hold down clip - height 23 mm – combinable with C37 wall angle	250	2.1
HDC W2		Steel perimeter hold down clip – height 40 mm - combinable with C37 wall angle	500	4.03
WSF		Wall Spring FIXT	100	0.6

Performance



Reaction to fire
Steel HDC: A1



Environment
Fully Recyclable

06.2024 | All colour codes mentioned are based on the NCS - Natural Colour System® property of and used on license from NCS Colour AB, Stockholm 2012 or the RAL colour standard. Subject to alterations in range and product technology without prior notice. Rockfon accepts no responsibility for printing errors.

Sounds Beautiful

