

DATASHEET

Rockfon Blanka® dB 41



Sounds Beautiful

Rockfon Blanka® dB 41









- Combines enhanced room-to-room sound insulation as well as a high level of sound absorption (Class A) for a flexible and quiet office layout
- Made from a 35mm stone wool core with a high-performance membrane on the back which reduces the transmission of noise from room-to-room
- The enhanced surface durability makes it more resistant to dirt and everyday wear and tear, enhancing the product lifetime
- Wide range of dimensions in concealed, semi-concealed and visible grid options
- Light weight sound insulating tile, easy to install/cut and clean with a vacuum or damp cloth

Product Description

- Stone wool tile
- Visible side: smooth, deep-matt and super-white painted fleece
- Rear side: high-performance membrane
- Durable painted edges

Application Areas

- Office
- Healthcare
- Education

Edge detail	Module size (mm)	Approximate weight (kg/m ²)	Recommended installation System	Recycled content	Cradle to Cradle Certified®	A1-A3 Production stage impact (kg CO ₂ eq/m ²)*	A1-C4 Full life cycle impact (kg CO ₂ eq/m ²)*
	600 x 600 x 35	5.6	Chicago Metallic™ T24 3820	37%		4.73	6.31
	1200 x 600 x 35	5.6	Chicago Metallic™ T24 3820	37%		4.73	6.31
	1200 x 600 x 35	5.6	Chicago Metallic™ T24 3820	37%		4.73	6.31
	600 x 600 x 35		Chicago Metallic™ T24 3820	37%		4.73	6.31
	600 x 600 x 35	Chicago Metallic™ T24 1812					
	1200 x 600 x 35	5.6	Chicago Metallic™ T24 1812	37%		4.73	6.31
	1200 x 600 x 35	5.6	Chicago Metallic™ T15 4070	37%		4.73	6.31
	600 x 600 x 35		Chicago Metallic™ T15 4070	37%		4.73	6.31
	600 x 600 x 35	Chicago Metallic™ T15 Ultraline 3500					
	1200 x 600 x 35	5.6	Chicago Metallic™ T15 Ultraline 3500	37%		4.73	6.31
	1200 x 600 x 35	5.6	Chicago Metallic™ T24 3820	37%		4.73	6.31
	600 x 600 x 35		Chicago Metallic™ T24 3820	37%		4.73	6.31
	600 x 600 x 35	Chicago Metallic™ T24 1812					
	1200 x 600 x 35	5.6	Chicago Metallic™ T24 1812	37%		4.73	6.31

* For full environmental impact disclosure, see our product EPDs available on rockfon.link/int-epd. Due to differences in calculation methods and scenario assumptions, environmental impact values are generally not directly comparable between manufacturers.

Performance



Sound absorption

α_w : 0.90 (Class A)



Direct sound insulation

R_w = 21 dB



Sound insulation improvement

Plenum 1000 mm

- ΔR_w = 9 dB
- $\Delta(R_w+C)$; $\Delta(R_w+C_{tr})$ = 8 ; 6 dB

Plenum 620 mm

- ΔR_w = 8 dB
- $\Delta(R_w+C)$; $\Delta(R_w+C_{tr})$ = 7 ; 5 dB

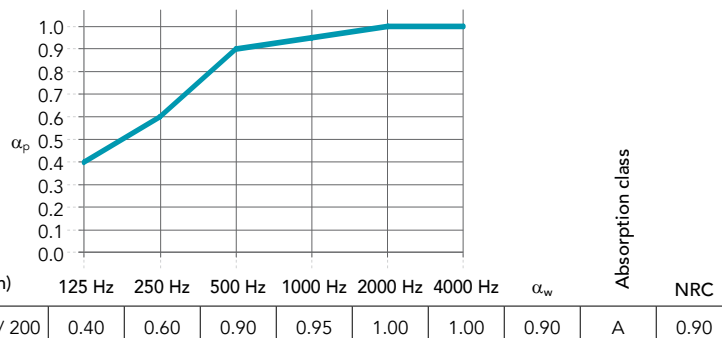
Plenum 350 mm

- ΔR_w = 9 dB
- $\Delta(R_w+C)$; $\Delta(R_w+C_{tr})$ = 7 ; 4 dB

Plenum 160 mm

- ΔR_w = 6 dB
- $\Delta(R_w+C)$; $\Delta(R_w+C_{tr})$ = 5 ; 2 dB

Weighted sound reduction improvement
performance measured in accordance with EN ISO 10140-series



Room to room sound insulation

$D_{n,f,w}$ = 41 dB

The sound insulation properties (R_w , $D_{n,f,w}$) presented in the datasheet represent A-edge tiles.



Reaction to fire

A2-s1,d0



Light reflection and light diffusion

87% light reflection
>99% light diffusion



Humidity and sag resistance

Up to 100% RH.
No visible deflection in high humidity.
C/0N



Cleaning

- Vacuum
- Damp cloth



Hygiene

Stone wool provides no sustenance to microorganisms



Surface durability

Enhanced durability and dirt resistance.

Wet-scrub resistance: Class 4

The wet-scrub resistance is tested in accordance with EN ISO 11998:2007 and rated following EN 12720:2009+A1:2013 scale going from 1 to 5, where 5 is the best.



Thermal insulation

Thermal conductivity: λ_D = 40 mW/mK
Thermal resistance: R = 0,85 m²K/W



Visual appearance

Super-white surface

L value: 94.5

The whiteness (L value) of the product is tested in accordance with ISO 7724 and measured on a scale from 1 (black) to 100 (white).

Deep matt surface, perfect in critical side-light

Gloss: 0.8 gloss unit at 85° angle

The gloss of the product is tested in accordance with ISO 2813.



Recyclability

Fully recyclable stone wool



Indoor environment

Rockfon ceiling products are classified in Class E1 in accordance with EN 13964 (EN 717-1). Rockfon ceiling products have a very low release of VOCs. A selection of Rockfon products have achieved the following performance levels and labels in indoor air emissions:



Material Health

All materials used in Rockfon products are screened against the technical checklist A20 and the list of substances restricted under REACH and do not contain substances of very high concern (SVHC). Rockfon stone wool fibres comply with safe fibre EU regulation and hold a EUCEB certification.

Sounds Beautiful

