

DATASHEET

Rockfon® MediCare® Standard



Sounds Beautiful

Rockfon® MediCare® Standard









- Fulfills all standard cleaning and hygienic requirements for use in healthcare environments
- Does not contribute to the growth of MRSA and ensures low particle emission (ISO Class 5)
- High sound absorption and highest fire safety (Class A1)
- Basic range of tile dimensions in semi-concealed and visible grid options

Product Description

- Stone wool tile
- Visible side: micro-textured white painted fleece
- Rear side: back fleece
- Painted edges

Application Areas

- Healthcare

Edge detail	Module size (mm)	Approximate weight (kg/m ²)	Recommended installation System	Recycled content	Cradle to Cradle Certified®	A1-A3 Production stage impact (kg CO ₂ eq/m ²)*	A1-C4 Full life cycle impact (kg CO ₂ eq/m ²)*
 A15	600 x 600 x 15	2.0	Rockfon® System T15 A™	30%		2.31	2.78
	1200 x 600 x 15	2.0	Rockfon® System T15 A™	30%		2.31	2.78
 A24	1200 x 600 x 15	2.0	Rockfon® System T24 A™	30%		2.31	2.78
	600 x 600 x 15		Rockfon® System T24 A™				
	600 x 600 x 15	2.0	Chicago Metallic™ T24 1812	30%		2.31	2.78
	1200 x 600 x 15		Chicago Metallic™ T24 1812				
 E15	600 x 600 x 15	2.2	Rockfon® System T15 E™	33%		2.7	3.31
	1200 x 600 x 15	2.2	Rockfon® System T15 E™	33%		2.7	3.31
	600 x 600 x 15	2.2	Chicago Metallic™ T15 Ultraline 3500	33%		2.7	3.31
	1200 x 600 x 15		Chicago Metallic™ T15 Ultraline 3500				
 E24	600 x 600 x 15	2.2	Rockfon® System T24 E™	33%		2.7	3.31
	1200 x 600 x 15		Rockfon® System T24 E™				
	600 x 600 x 15	2.2	Chicago Metallic™ T24 1812	33%		2.7	3.31
	1200 x 600 x 15		Chicago Metallic™ T24 1812				

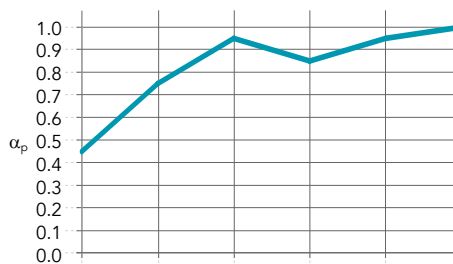
* For full environmental impact disclosure, see our product EPDs available on rockfon.link/int-epd. Due to differences in calculation methods and scenario assumptions, environmental impact values are generally not directly comparable between manufacturers.



Performance



Sound absorption
 α_w : 0.95 (Class A)



Edge / Thickness (mm) /
 Suspension (incl. tile - mm)

Edge / Thickness (mm) / Suspension (incl. tile - mm)	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	α_w	Absorption class	NRC
15 / 200	0.45	0.75	0.95	0.85	0.95	1.00	0.95	A	0.90



Reaction to fire
 A1



Light reflection
 86%



Humidity and sag resistance
 Up to 100% RH.
 No visible deflection in high humidity.
 C/0N



Cleaning
 - Vacuum
 - Damp cloth



Hygiene
 Stone wool provides no sustenance to microorganisms
 Microbiological class M1 fulfilling the requirements of Zone 4 (very high risk) defined by NF S 90-351:2013.
 Tested with:
 - Methicillin Resistant Staphylococcus Aureus (MRSA)
 - Candida Albicans
 - Aspergillus Brasiliensis



Clean Room
 ISO Class 5



Recyclability
 Fully recyclable stone wool



Indoor environment
 Rockfon ceiling products are classified in Class E1 in accordance with EN 13964 (EN 717-1). Rockfon ceiling products have a very low release of VOCs. A selection of Rockfon products have achieved the following performance levels and labels in indoor air emissions:



Material Health
 All materials used in Rockfon products are screened against the technical checklist A20 and the list of substances restricted under REACH and do not contain substances of very high concern (SVHC). Rockfon stone wool fibres comply with safe fibre EU regulation and hold a EUCEB certification.

Sounds Beautiful

