


Rockfon[®] CleanSpace[™] Pro

Datasheet

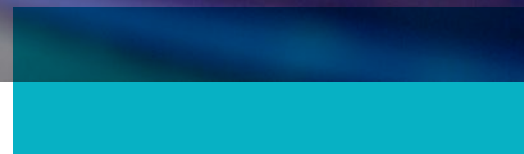

Sounds Beautiful

Rockfon® CleanSpace™ Pro



- Rockfon CleanSpace Pro is a cleanable ceiling tile with good acoustic properties. Applicable in various practical and industrial room types with cleanability requirements. The product is long-lasting and withstands numerous cleaning and disinfection methods
- Full range of formats in semi-concealed and visible grid options
- High sound absorption (Class A) and highest fire safety (Class A1)
- Low particle emission: ISO Class 4
- Rockfon CleanSpace Pro is HACCP verified ensuring safe application in food- and beverage industry
- Rockfon CleanSpace Pro has an anti-static surface that withstands exposure to dust and enhances the product lifetime

Product Description

- Stone wool tile
- Visible side: micro-textured white painted, water repellent fleece
- Rear side: back fleece
- Sealed edges

Application Areas

- Healthcare
- Education
- Retail
- Leisure
- Industry


Edge detail	Module size (mm)	Approximate weight (kg/m ²)	Recommended installation System
 <p>A24</p>	600 x 600 x 20	2.3	Rockfon® System CleanSpace T24 A, E™
	1200 x 600 x 20	2.3	Rockfon® System CleanSpace T24 A, E™
	600 x 600 x 40	3.3	Rockfon® System CleanSpace T24 A, E™
	1200 x 600 x 40	3.3	Rockfon® System CleanSpace T24 A, E™
 <p>E24</p>	600 x 600 x 20	2.3	Rockfon® System CleanSpace T24 A, E™
	1200 x 600 x 20	2.3	Rockfon® System CleanSpace T24 A, E™



Performance



Sound absorption
 α_w : 1.00 (Class A)

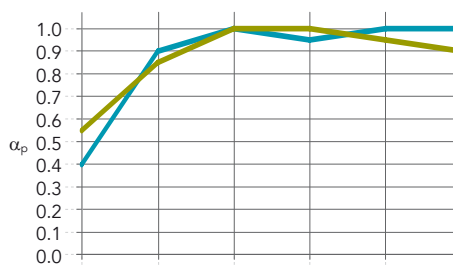

Edge / Thickness (mm) /
 Suspension (incl. tile - mm)

	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	α_w	Absorption class	NRC
A,E: 20 / 200	0.40	0.90	1.00	0.95	1.00	1.00	1.00	A	0.95
A: 40 / 200	0.55	0.85	1.00	1.00	0.95	0.90	1.00	A	0.95



Reaction to fire
 A1



Light reflection
 85%



Humidity and sag resistance

Up to 100% RH.
 No visible deflection in high humidity. There will always be some dust/dirt on the panels after some time, and with regular exposure to high humidity this could lead to fungi growth. Please avoid condensation on the panel
 C/0N



Cleaning

- Vacuum
- Damp cloth
- Dry steam cleaning (twice a year)
- Low pressure foam cleaning (twelve times a year)
- High pressure cleaning (only applicable for A-edge installation). Max. 80 bar, min. 1 meter distance, water spread at 30° angle, max. water flow 360 L/h. The tiles should be clipped into the grid.
- Chemical resistance: Tested according to ISO 2812-3:2019 and classified in accordance with EN 12720. Rating on a scale from 1 to 5, where 5 is the best. We obtained 5 for the following detergents and disinfectants (monthly disinfection): Active chlorine 2,6%, quaternary ammonium 0,25%, hydrogen peroxide 5%, Ethanol 70% and Isopropanol 70%



Surface durability

Enhanced durability and dirt resistance.



Hygiene

Stone wool provides no sustenance to microorganisms

Microbiological class M1 fulfilling the requirements of Zone 4 (very high risk) defined by NF S 90-351:2013.

Tested with:

- Methicillin Resistant Staphylococcus Aureus (MRSA)
- Candida Albicans
- Aspergillus Brasiliensis
- E.Coli
- Bacillus cereus

M1 (zone 4) for the 5 tested pathogens.

The particle elimination kinetics class is conform to CP(0,5)5 according to the norm NF S 90-351:2013.



Disinfection

- Resistant to using Hydrogen Peroxide Vapor disinfection with impact on aeration time



Clean Room

ISO Class 4



Environment

Fully recyclable stone wool
 The recycled content of Rockfon products is between 29% and 64% according to ISO 14021.

Rockfon acoustic solutions are Cradle to Cradle Certified® Silver and Bronze (depending on product type).



Carbon footprint

2.43 - 3.31 kg of CO2 eq.
 (cradle to gate based on EPD)



Indoor environment

A selection of Rockfon products have been awarded the Finnish M1 emission classification for building materials and the Danish Indoor Climate Label for low emission products



Rockfon® is a registered trademark
of the ROCKWOOL Group.

 [linkedin.com/company/Rockfon-as](https://www.linkedin.com/company/Rockfon-as)

 [pinterest.com/Rockfon](https://www.pinterest.com/Rockfon)

 [youtube.com/RockfonOfficial](https://www.youtube.com/RockfonOfficial)

 [facebook.com/RockfonOfficial](https://www.facebook.com/RockfonOfficial)

 [instagram.com/Rockfon_Official](https://www.instagram.com/Rockfon_Official)

06/2022 | All colour codes mentioned are based on the NCS - Natural Colour System® property of and used on
license from NCS Colour AB, Stockholm 2012 or the RAL colour standard. Subject to alterations in range and product
technology without prior notice. Rockfon accepts no responsibility for printing errors.

Sounds Beautiful

Rockfon Singapore

ROCKWOOL Building Materials
(Singapore) Pte Ltd.
No. 7, Tuas Avenue 1
Jurong Town,
Singapore 639492
Tel: (+65) 6861 4722
Fax: (+65) 6862 3533
E-mail: enquiry@rockfon.com
en.rockfon.international

Rockfon Hong Kong

ROCKWOOL Building Materials
(Hong Kong) Ltd.
Unit 301-2, 3/F, Koon Wah Building,
No.2 Yuen Shun Circuit,
Yuen Chau Kok, Shatin,
N.T., Hong Kong
Tel: (+852) 2576-6117
Mobile: (+852) 9161-7924
E-mail: enquiry@rockfon.com
en.rockfon.international

Rockfon

ROCKWOOL Middle East FZE
Office 139, Building 6WB, DAFZA
P. O. Box 293585, Dubai, UAE

Tel: +971-4-214-6280
E-mail: rockfonme@rockfon.com
en.rockfon.international

Rockfon

ROCKWOOL France S.A.S.
111, rue du Château des Rentiers
75013 Paris

Tel: +33 1 40 77 82 82
Fax.: +33 1 45 86 77 90
E-mail: info@rockfon.fr
www.rockfon.fr

