
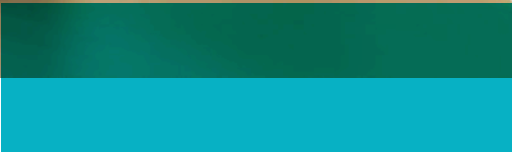


Rockfon Contour®

Datasheet



Sounds Beautiful

Rockfon Contour®


- Aesthetically pleasing, frameless acoustic baffles
- Very quick and easy to install
- Used to enhance the sound absorption of an existing ceiling
- Ideally suited for enhancing acoustics in thermal mass areas or where frequent and unhindered access to services is required

Product Description

- Stone wool baffle
- Visible sides: smooth, matt white, painted fleece
- Painted edges
- Anchor points integrated during production

Application Areas

- Education
- Retail
- Healthcare
- Industry
- Office
- Leisure

Edge detail	Module size (mm)	Approximate weight (kg/unit)	Recommended installation System
Ac 	1200 x 600 x 50	4.6	-


Contact us for special sizes, lead times and minimum quantities.



Performance



Sound absorption
 A_{eq} (m²/item)

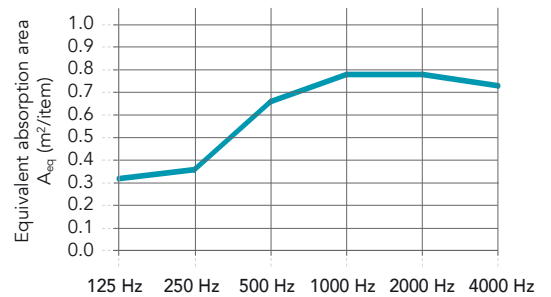

1200x600x50: single item (1 baffle/m ² ; row distance: 83 cm)	0.32	0.36	0.66	0.78	0.78	0.73
--	------	------	------	------	------	------



Reaction to fire
 A1



Light reflection
 79%



Humidity and sag resistance
 Up to 100% RH. There will always be some dust/dirt on the panels after some time, and with regular exposure to high humidity this could lead to fungi growth. Please avoid condensation on the panel
 Rockfon Contour is not suitable for use in swimming pools or outdoors.
 For more information, please contact Rockfon.



Cleaning
 - Vacuum



Hygiene
 Stone wool provides no sustenance to microorganisms



Environment
 Fully recyclable stone wool
 The recycled content of Rockfon products is between 29% and 64% according to ISO 14021.
 Rockfon acoustic solutions are Cradle to Cradle Certified® Silver and Bronze (depending on product type).



Carbon footprint
 6.12 kg of CO₂ eq.
 (cradle to gate based on EPD)



Indoor environment
 A selection of Rockfon products have been awarded the Finnish M1 emission classification for building materials and the Danish Indoor Climate Label for low emission products



Rockfon® is a registered trademark
of the ROCKWOOL Group.

 [linkedin.com/company/Rockfon-as](https://www.linkedin.com/company/Rockfon-as)

 [pinterest.com/Rockfon](https://www.pinterest.com/Rockfon)

 [youtube.com/RockfonOfficial](https://www.youtube.com/RockfonOfficial)

 [facebook.com/RockfonOfficial](https://www.facebook.com/RockfonOfficial)

 [instagram.com/Rockfon_Official](https://www.instagram.com/Rockfon_Official)

03.2022 | All colour codes mentioned are based on the NCS - Natural Colour System® property of and used on
license from NCS Colour AB, Stockholm 2012 or the RAL colour standard. Subject to alterations in range and product
technology without prior notice. Rockfon accepts no responsibility for printing errors.

Sounds Beautiful

Rockfon Singapore

ROCKWOOL Building Materials
(Singapore) Pte Ltd.
No. 7, Tuas Avenue 1
Jurong Town,
Singapore 639492
Tel: (+65) 6861 4722
Fax: (+65) 6862 3533
E-mail: enquiry@rockfon.com
en.rockfon.international

Rockfon Hong Kong

ROCKWOOL Building Materials
(Hong Kong) Ltd.
Unit 301-2, 3/F, Koon Wah Building,
No.2 Yuen Shun Circuit,
Yuen Chau Kok, Shatin,
N.T., Hong Kong
Tel: (+852) 2576-6117
Mobile: (+852) 9161-7924
E-mail: enquiry@rockfon.com
en.rockfon.international

Rockfon

ROCKWOOL Middle East FZE
Office 139, Building 6WB, DAFZA
P. O. Box 293585, Dubai, UAE

Tel: +971-4-214-6280
E-mail: rockfonme@rockfon.com
en.rockfon.international

Rockfon

ROCKWOOL France S.A.S.
111, rue du Château des Rentiers
75013 Paris

Tel: +33 1 40 77 82 82
Fax.: +33 1 45 86 77 90
E-mail: info@rockfon.fr
www.rockfon.fr

