
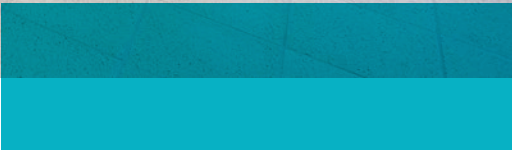


Rockfon® MediCare® Standard

Datasheet



Sounds Beautiful

Rockfon® MediCare® Standard





- Fulfils all standard cleaning and hygienic requirements for use in healthcare environments
- Does not contribute to the growth of MRSA and ensures low particle emission (ISO Class 5)
- High sound absorption and highest fire safety (Class A1)
- Basic range of tile dimensions in semi-concealed and visible grid options

Product Description

- Stone wool tile
- Visible side: micro-textured white painted fleece
- Rear side: back fleece
- Painted edges

Application Areas

- Healthcare


Edge detail	Module size (mm)	Approximate weight (kg/m ²)	Recommended installation System
 A15	600 x 600 x 15	2.0	Rockfon® System T15 A™
	1200 x 600 x 15	2.0	Rockfon® System T15 A™
 A24	600 x 600 x 15	2.0	Chicago Metallic™ T24 1812
		2.0	Rockfon® System T24 A™
	1200 x 600 x 15	2.0	Chicago Metallic™ T24 1812
		2.0	Rockfon® System T24 A™
 E15	600 x 600 x 15	2.2	Chicago Metallic™ T15 Ultraline 3500
		2.2	Chicago Metallic™ T15 Decorline 3700
		2.2	Rockfon® System T15 E™
	1200 x 600 x 15	2.2	Chicago Metallic™ T15 Ultraline 3500
		2.2	Chicago Metallic™ T15 Decorline 3700
		2.2	Rockfon® System T15 E™
 E24	600 x 600 x 15	2.2	Chicago Metallic™ T24 1812
		2.2	Rockfon® System T24 E™
	1200 x 600 x 15	2.2	Chicago Metallic™ T24 1812
		2.2	Rockfon® System T24 E™



Performance



Sound absorption
 α_w : 0.95 (Class A)

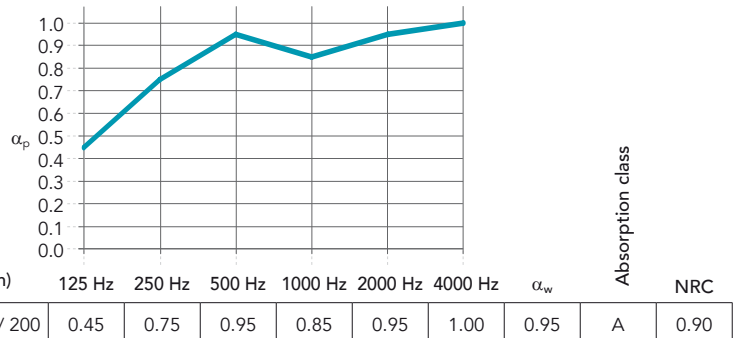

Reaction to fire
 A1



Light reflection
 86%



Humidity and sag resistance
 Up to 100% RH.
 No visible deflection in high humidity. There will always be some dust/dirt on the panels after some time, and with regular exposure to high humidity this could lead to fungi growth. Please avoid condensation on the panel
 C/ON



Cleaning
 - Vacuum
 - Damp cloth



Hygiene
 Stone wool provides no sustenance to microorganisms
 Microbiological class M1 fulfilling the requirements of Zone 4 (very high risk) defined by NF S 90-351:2013.
 Tested with:
 - Methicillin Resistant Staphylococcus Aureus (MRSA)
 - Candida Albicans
 - Aspergillus Brasiliensis



Clean Room
 ISO Class 5



Environment
 Fully recyclable stone wool
 The recycled content of Rockfon products is between 29% and 64% according to ISO 14021.
 Rockfon acoustic solutions are Cradle to Cradle Certified® Silver and Bronze (depending on product type).



Carbon footprint
 2.04 - 2.43 kg of CO2 eq.
 (cradle to gate based on EPD)



Indoor environment
 A selection of Rockfon products have been awarded the Finnish M1 emission classification for building materials and the Danish Indoor Climate Label for low emission products



09.2022 | All colour codes mentioned are based on the NCS - Natural Colour System® property of and used on license from NCS Colour AB, Stockholm 2012 or the RAL colour standard. Subject to alterations in range and product technology without prior notice. Rockfon accepts no responsibility for printing errors.

Sounds Beautiful

