


DATASHEET

# **Chicago Metallic™ 125 mm Bandraster 3125**

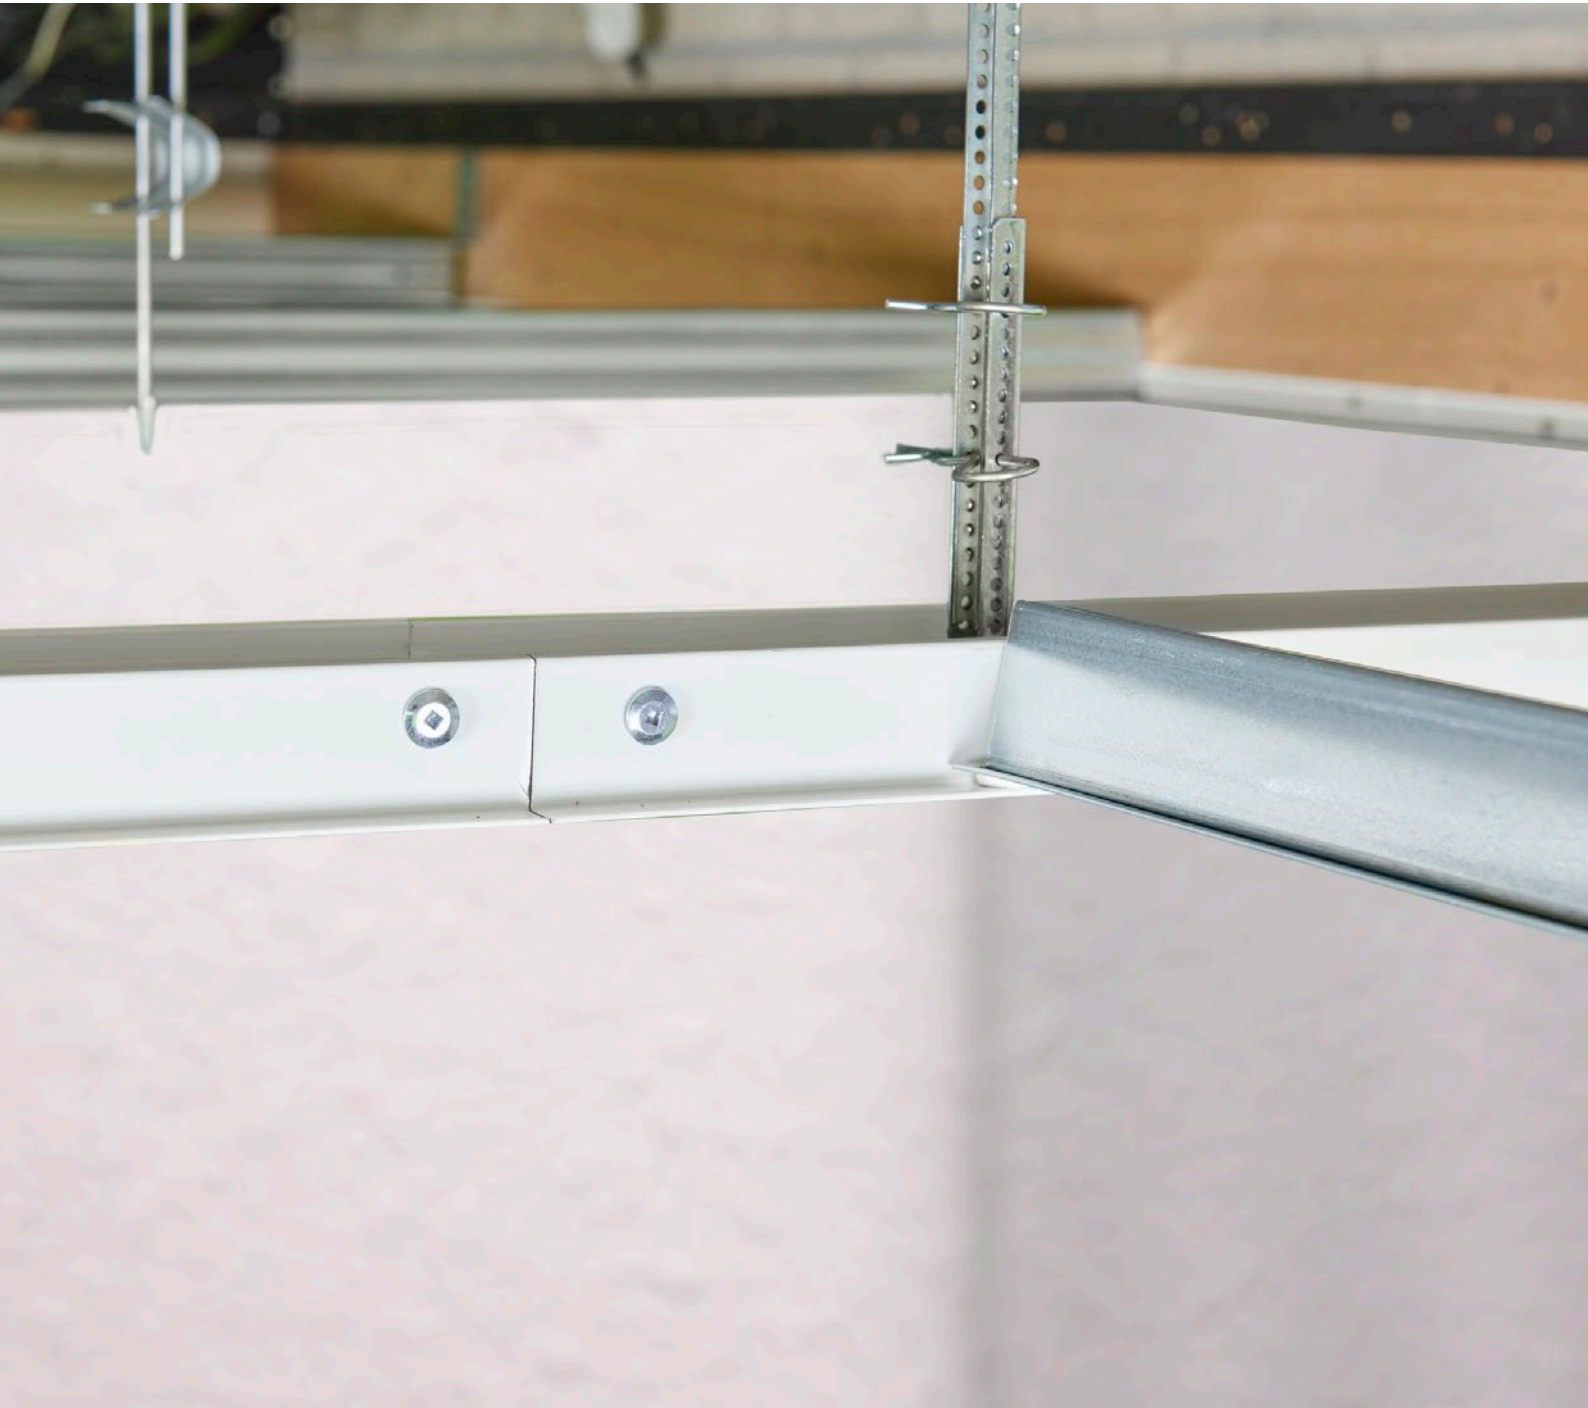


**Sounds Beautiful**


# Chicago Metallic™ 125 mm Bandraster 3125

- The 125 mm wide grid system is suitable for the flexible layout of large spaces and positioning of partition walls
- Suitable for the installation of acoustic and fire protection barriers in plenum spaces
- System includes a wide range of spacers and accessories
- Compatible with exposed, semi-concealed and concealed grid ceilings

## Cross-section



## Compatible tiles






## Coupling

Straight-cut



## Assortment

Product group		Component description	Height (mm)	Length (mm)	Colour	Pcs per pack	Lm per pack	Kg per pack
<b>Main runner</b>								
BR125		Bandraster main runner 125 mm	35.4	3600	04, 001	4	14.4	20.4
<b>Cross tee</b>								
BR100 T15 HD CT		Bandraster cross tee T15 Hook	38		001			
BR100 T24 CT			38		11W, 001			
BR100 T24 HD CT			38		11W, 001			
<b>Z-section</b>								
Z40		Z-section 40 mm	40.6		00	20		
Z40 HOOK		Z-section 40 mm with hook	40.6		00	20		
<b>Wall angle options</b>								
L24x24		L-wall angle 24x24 mm colour	24	3050	Color-All, 11W, 88B, 04, 901	40	122	25.5
L24x24		L-wall angle 24x24 mm white	24	3050	001	40	122	25.5
W10x15		W-profile 15x15x10x15 mm	15	3050	Color-All, 04, 88B, 11W, 001, 901	30	91.5	19.9
<b>Accessories</b>								
BR125 LC		Length coupling for bandraster 125 mm				25		3.9
BR125 CC		Cross connector for bandraster 125 mm				25		3.6
BR125 WC		Wall connector for bandraster 125 mm				25		3.6
BR125/C100,5 H		Flat hanger for bandraster 125 mm and C-bandraster 100 mm	100			100		4.5
BR125/C100,5 HB		Bent hanger for bandraster 125 mm and C-bandraster 100 mm	84.5			100		4.6
PINC BR		Slot pincer for bandraster 50, 75, 100, 125, 150 mm				1		2.5

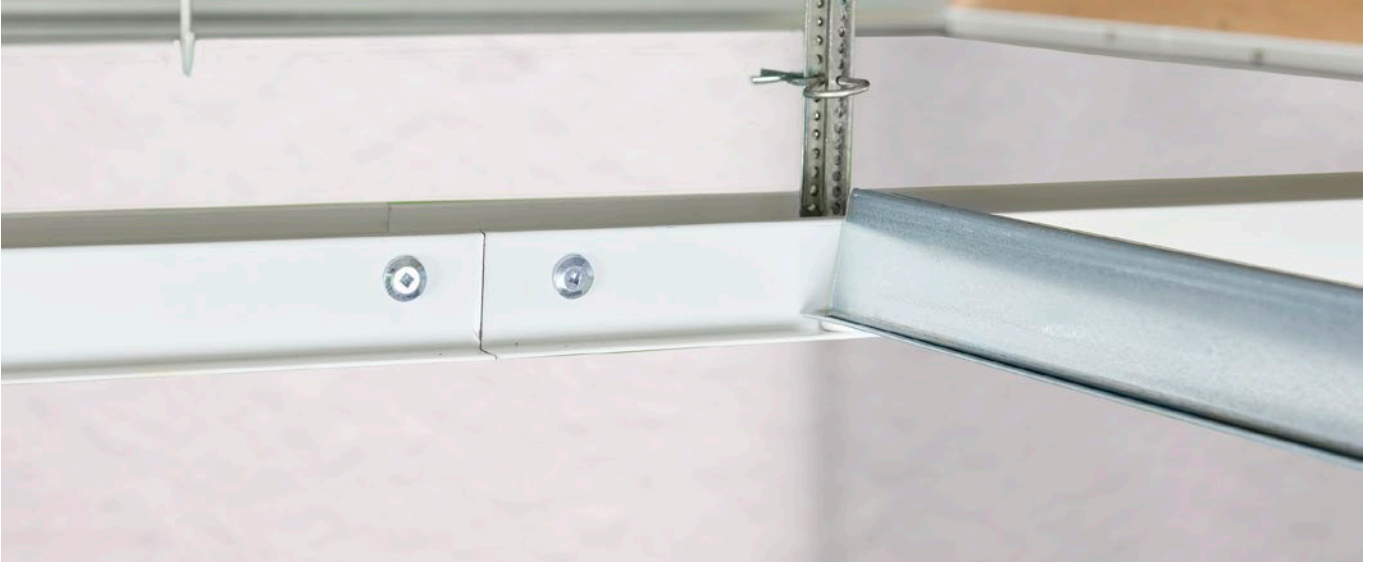

## Performance



### Load bearing capacity

\* 75 mm spacers

Hanger distance (mm)	Modulation (mm)	Kg/m <sup>2</sup>	
		Maximum deflection	
		2.5 mm	4.0 mm
1200	1200 x 600	19.2	31.4
1200	1500 x 600	8.5	14.2
1200	1800 x 600	4	6.9
1200	2100 x 600	12.9*	21.5*



### Reaction to fire

A1



### Corrosion resistance

B



### Environment

Fully Recyclable

06.2024 | All colour codes mentioned are based on the NCS - Natural Colour System® property of and used on license from NCS Colour AB, Stockholm 2012 or the RAL colour standard. Subject to alterations in range and product technology without prior notice. Rockfon accepts no responsibility for printing errors.

# Sounds Beautiful

