


# Rockfon Humitec<sup>®</sup> Baffle

Datasheet

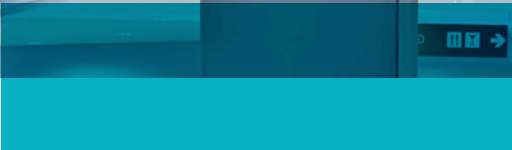

# Rockfon Humitec® Baffle


- Flexible free-hanging acoustic solutions, perfect for humid or harsh indoor atmospheres or for areas that require regular cleaning
- Built to withstand humid and corrosive Class D environments
- Comes with a robust and durable frame that protects the panel edges from damages and ensures cleanliness
- Ideal for areas where frequent or unhindered access to services is required

## Product Description


- Panel: Micro-textured white painted, water repellent fleece
- Frame: White powder coated hot galvanised steel with the multi-functional clip that offers several mounting methods.

## Application Areas

- Healthcare
- Leisure
- Industry

Edge detail	Module size (mm)	Approximate weight (kg/unit)	Recommended installation System
<b>4F</b> 	1200 x 450 x 50	3.4	Rockfon® System Humitec Baffle™
	1200 x 600 x 50	4.2	Rockfon® System Humitec Baffle™

Edge detail 4F = 4 Framed

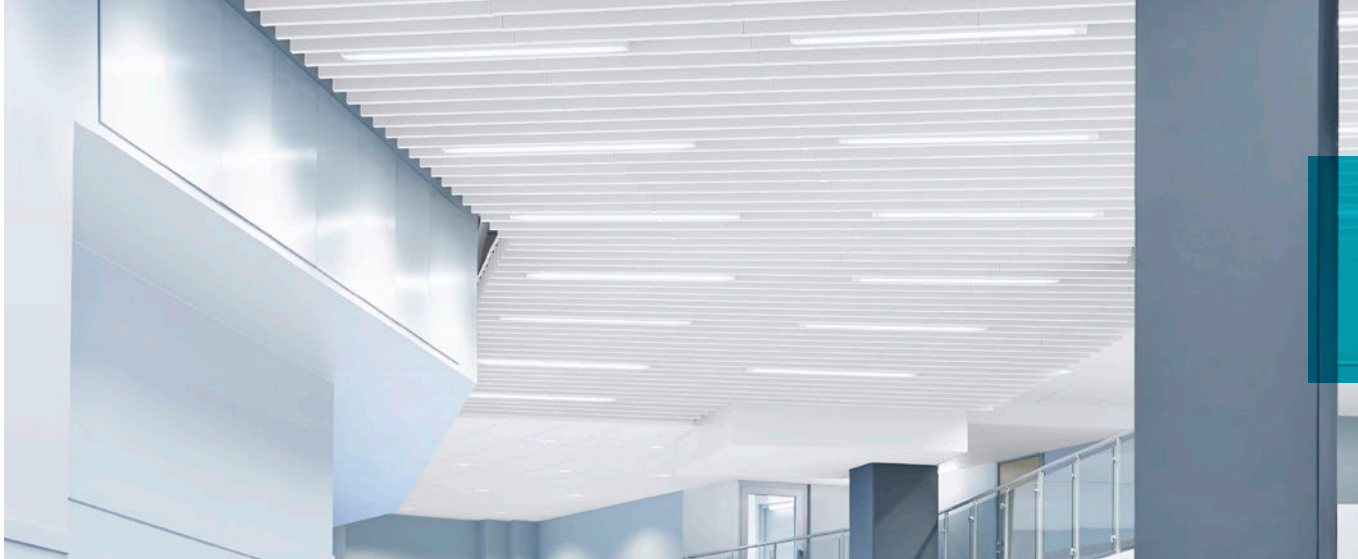


## Performance



### Sound absorption

$A_{eq}$  (m<sup>2</sup>/item)

C - center distance between baffles' rows,  
H - suspension height: net distance between baffle  
and the soffit

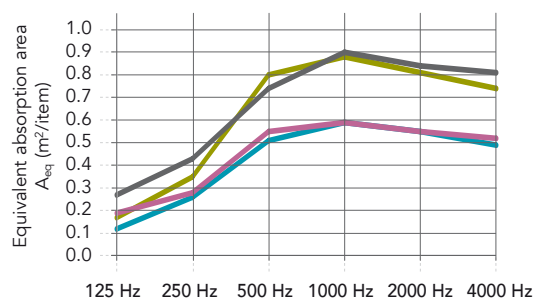

	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz
1200x600x50 (4F) - Baffles in rows, C600, H300	0.12	0.26	0.51	0.59	0.55	0.49
1200x600x50 (4F) - Baffles in rows, C1200, H300	0.17	0.35	0.80	0.88	0.81	0.74
1200x600x50 (4F) - Baffles in rows, C600, H40	0.19	0.28	0.55	0.59	0.55	0.52
1200x600x50 (4F) - Baffles in rows, C1200, H40	0.27	0.43	0.74	0.90	0.84	0.81



### Reaction to fire

A2-s1,d0



### Light reflection

85%



### Cleaning

- Vacuum
- Damp cloth
- Dry steam cleaning (twice a year)
- Low pressure foam cleaning
- High pressure cleaning: Max. 80 bar, min. 1 meter distance, water spread at a 30° angle
- Chemical resistance: resistant to diluted solutions of ammonia, chlorine and hydrogen peroxide



### Hygiene

Stone wool provides no sustenance to microorganisms



### Surface durability

Enhanced durability and dirt resistance.



### Safety against failure

Class D (40°C, 95% RH)

According to EN13964:2014



### Corrosion resistance

Class D (EN13964)



### Clean Room

ISO Class 2



### Environment

Fully recyclable stone wool  
The recycled content of Rockfon products is between 29% and 64% according to ISO 14021.  
Rockfon acoustic solutions are Cradle to Cradle Certified® Silver and Bronze (depending on product type).



### Carbon footprint

3.92 kg of CO<sub>2</sub> eq.  
(cradle to gate based on EPD)



### Indoor environment

A selection of Rockfon products have been awarded the Finnish M1 emission classification for building materials and the Danish Indoor Climate Label for low emission products



Rockfon® is a registered trademark  
of the ROCKWOOL Group.

 [linkedin.com/company/Rockfon-as](https://www.linkedin.com/company/Rockfon-as)

 [pinterest.com/Rockfon](https://www.pinterest.com/Rockfon)

 [youtube.com/RockfonOfficial](https://www.youtube.com/RockfonOfficial)

 [facebook.com/RockfonOfficial](https://www.facebook.com/RockfonOfficial)

 [instagram.com/Rockfon\\_Official](https://www.instagram.com/Rockfon_Official)

03.2022 | All colour codes mentioned are based on the NCS - Natural Colour System® property of and used on  
license from NCS Colour AB, Stockholm 2012 or the RAL colour standard. Subject to alterations in range and product  
technology without prior notice. Rockfon accepts no responsibility for printing errors.

## Sounds Beautiful

### Rockfon Singapore

ROCKWOOL Building Materials  
(Singapore) Pte Ltd.  
No. 7, Tuas Avenue 1  
Jurong Town,  
Singapore 639492  
Tel: (+65) 6861 4722  
Fax: (+65) 6862 3533  
E-mail: [enquiry@rockfon.com](mailto:enquiry@rockfon.com)  
[en.rockfon.international](http://en.rockfon.international)

### Rockfon Hong Kong

ROCKWOOL Building Materials  
(Hong Kong) Ltd.  
Unit 301-2, 3/F, Koon Wah Building,  
No.2 Yuen Shun Circuit,  
Yuen Chau Kok, Shatin,  
N.T., Hong Kong  
Tel: (+852) 2576-6117  
Mobile: (+852) 9161-7924  
E-mail: [enquiry@rockfon.com](mailto:enquiry@rockfon.com)  
[en.rockfon.international](http://en.rockfon.international)

### Rockfon

ROCKWOOL Middle East FZE  
Office 139, Building 6WB, DAFZA  
P. O. Box 293585, Dubai, UAE  
  
Tel: +971-4-214-6280  
E-mail: [rockfonme@rockfon.com](mailto:rockfonme@rockfon.com)  
[en.rockfon.international](http://en.rockfon.international)

### Rockfon

ROCKWOOL France S.A.S.  
111, rue du Château des Rentiers  
75013 Paris  
  
Tel: +33 1 40 77 82 82  
Fax.: +33 1 45 86 77 90  
E-mail: [info@rockfon.fr](mailto:info@rockfon.fr)  
[www.rockfon.fr](http://www.rockfon.fr)

